

GIANT EX1200



- **Engine Gross Power**
: 567 kW (760 hp)
- **Operating Weight**
 - Backhoe : 108 000 kg
(238 100 lb)
 - BE-front : 109 000 kg
(240 300 lb)
 - Loading Shovel : 111 000 kg
(244 500 lb)
- **Backhoe Bucket**
 - PCSA (1:1) Heaped :
3.0 – 6.5 m³ (3.92 – 8.50 yd³)
 - CECE (2:1) Heaped :
2.7 – 5.7 m³ (3.53 – 7.46 yd³)
- **Loading Shovel Bucket**
 - PCSA Heaped :
5.9 – 6.5 m³ (7.7 – 8.5 yd³)

A large yellow Hitachi EX1200 excavator is shown from a low angle, emphasizing its massive size. A worker wearing a white uniform and a blue hard hat is seated in the operator's cab, looking forward. The machine's arm and bucket are visible on the left side. The background is a clear blue sky. The text "NEW GIANT" is written in large, bold, blue and white letters across the middle of the image. Below it, the text "OFFERS TRUE VALUE" is written in smaller, white, italicized letters.

NEW GIANT

OFFERS TRUE VALUE

Within the huge Hitachi EX1200 you'll find all the essentials of a truly outstanding machine. Rest assured that like all Hitachi equipment, the EX1200 has been designed for safety, productivity, durability and comfort. Hitachi has blended the latest technology with tough performance to create what it calls the "New Giant" that is ready to take on the excavating needs of today and tomorrow.

HIGHER PRODUCTION

More Powerful Engine

The source of the high production.

The EX1200 is equipped with a powerful large-displacement engine. An intercooler is used to provide optimal fuel efficiency, helping to keep total running costs down.

412 kW (560 PS) **567 kW (760 hp)**
(EX1100-3)

Larger Bucket

Provides high work capacity.

The large capacity bucket offers an increased excavating power-to-bucket-width ratio. The result is increased work efficiency for higher production.



• Backhoe bucket: **3.0 m³ (3.92 yd³) — 5.0 m³ (6.54 yd³)**

• BE bucket: **5.6 m³ (7.32 yd³) — 6.5 m³ (8.50 yd³)**

More Powerful Excavation

Increased power for excavating.

The powerful engine is combined with a highly efficient hydraulic system to offer the excavating power for even the toughest sites.

Maximum Excavating Force

• 9.1 m (29' 10") boom / 3.4 m (11' 2") arm with general purpose bucket **457 kN (46 600 kgf, 102 700 lbf)**

Rock bucket **475 kN (48 400 kgf, 106 700 lbf)**

• 7.55 m (24' 9") BE-boom / 3.4 m (11' 2") BE-arm with general purpose bucket **550 kN (56 100 kgf, 123 700 lbf)**

Rock bucket **550 kN (56 100 kgf, 123 700 lbf)**

Bucket Passes to Dump Trucks

	HITACHI EH600	HITACHI EH750
Maximum Payload	36.5 US ton	42.5 US ton
Body Capacity (SAE 2:1 Heaped)	21.0 m³ (27.5 yd³)	27.7 m³ (36.3 yd³)
Backhoe (BE) 6.5 m³ (8.5 yd³)	3 or 4	4 or 5
Loading Shovel 6.5 m³ (8.5 yd³)	3 or 4	4 or 5

Combined Front Operations

Fast and efficient operation.

The popular Optimum Hydraulic System (OHS) is used along with the newly developed arm regenerative and boom regenerative mechanism for smooth and efficient front operations.



E/P Control

Provides a balance between economical operation and power.

Speed sensing control is used to efficiently control engine output. This system incorporates a microcomputer to regulate engine and hydraulic pump output to the level of work being performed.



• S/P mode increases productivity

Choose the S/P mode to boost power during strenuous operation.

• E mode reduces fuel consumption

This mode lowers fuel consumption during light-duty operations.



Auto Idle and Quick Idle


Help to reduce fuel consumption even more.



Heavy Lifting Function

Increases boom lift performance by 10%.


A touch of a button gives the added power for breaking up rock or working under harsh conditions.





Boom and Arm Designed for durability.

A box-section structure has been adopted on the front attachment for its large cross-sectional area. In addition, bulkheads arranged inside the front attachment increase rigidity to resist torsion, further strengthening the structure. The enhanced durability will be especially welcome for extended operation at tough work sites such as mines.

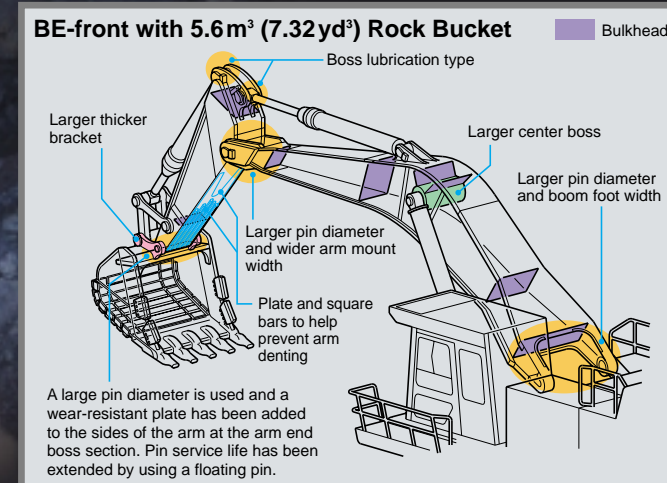


New Giant Offers True Value **2**

STRONG FRONT ARM


Rock Bucket
[(5.0m³ (6.54yd³)/5.6m³ (7.32yd³) rock bucket]
Designed for harsh work conditions.

Reinforced bucket designed specifically for withstanding the impact encountered when handling crushed rock.

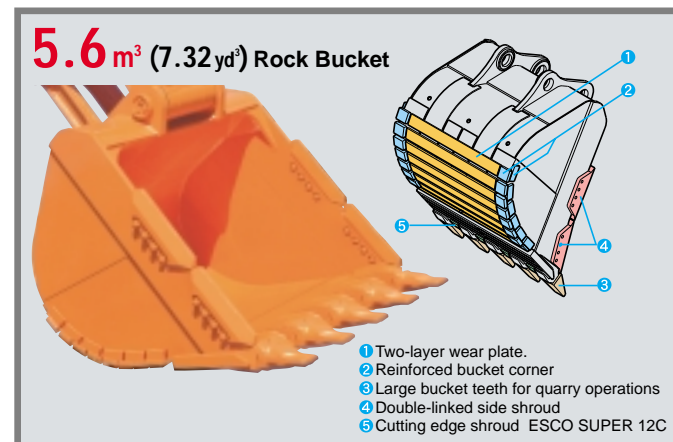


Reinforced Pin Section
To provide a long service life to the arm end.

- Replaceable wear-resistant plate at the arm tip boss. [(For machines with 3.4 m (11' 2") BE-arm, 3.4 m (11' 2") and 4.5 m (14' 9") arm)]
- Arm tip pin converted from fixed type to floating pin, extending service life. [(For machines with 3.4 m (11' 2") BE-arm and 3.4 m (11' 2") arm only)]

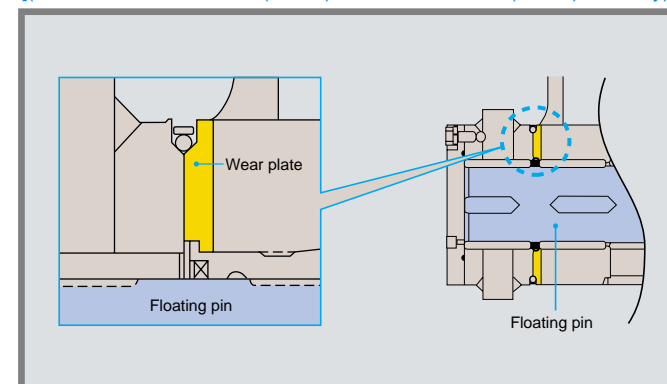

Under-plate Protection
A special plate and square bars are used to help prevent arm denting.

The damage prevention plate, fitted with reinforcing square bars, is installed as standard on the arm. This protects the arm bottom from damage from loaded rocks.



[(For machines with 3.4 m (11' 2") BE-arm and 3.4 m (11' 2") arm only)]

Large Displacement Engine with Low Operating RPM
Provides a reliable power source.

The large-displacement engine with power to spare will provide a long service life.

Independently Mounted Oil Cooler
Reduced heat helps increase hydraulic component durability.

The oil cooler and the radiator have been mounted in separate locations to reduce heat build up and increase cooling efficiency. Lower hydraulic oil temperature helps to increase the durability of hydraulic components.



New Giant Offers True Value **3**

STRONG UNDERCARRIAGE

Giant Undercarriage
Forming the base for powerful operation.



The large undercarriage, 4 610 mm (15' 1") wide and 6 410 mm (21' 0") long, provides stability.

Rugged Travel Device
Damage-resistant travel device keeps the Giant moving.

The shape of the frame has been changed and thicker steel plates have been used to boost durability and reduce downtime from damage.

Track Center Frame
Built for high reliability.

The mounting section for the track center frame swing gear has an integral cast steel design to reduce the concentration of stress forces, thereby boosting reliability.

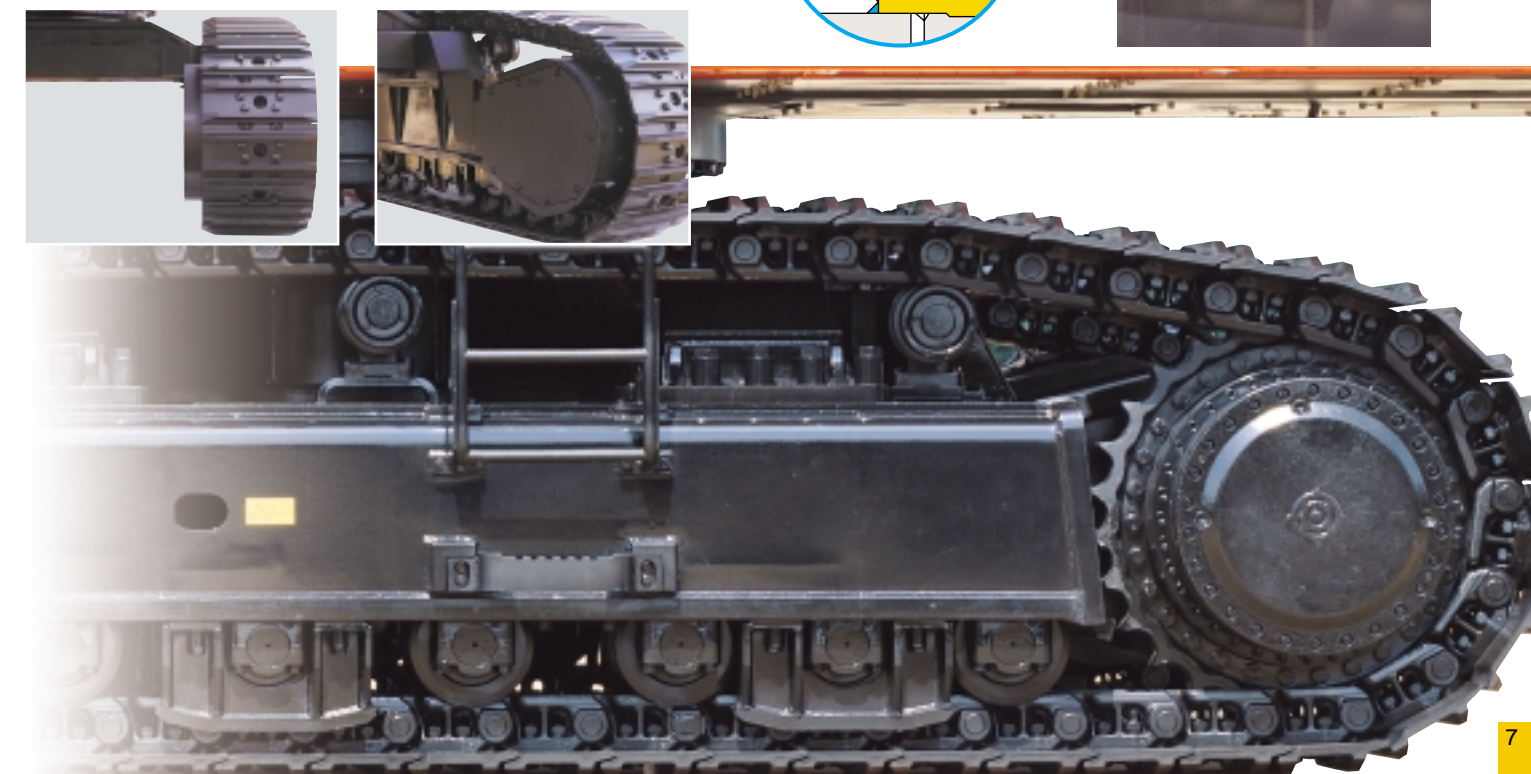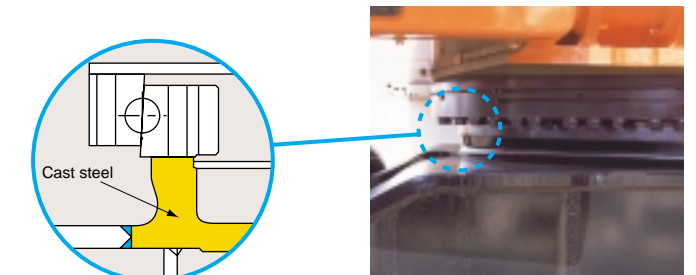


EASY MAINTENANCE HELPS REDUCE TOTAL LIFETIME COST

Easy Inspection and Maintenance

Wide access helps speed essential inspection time and reduce maintenance costs.

Plenty of room is provided for performing inspections. Key components have been centrally positioned and walkways have been provided to make inspections and maintenance as easy as possible.

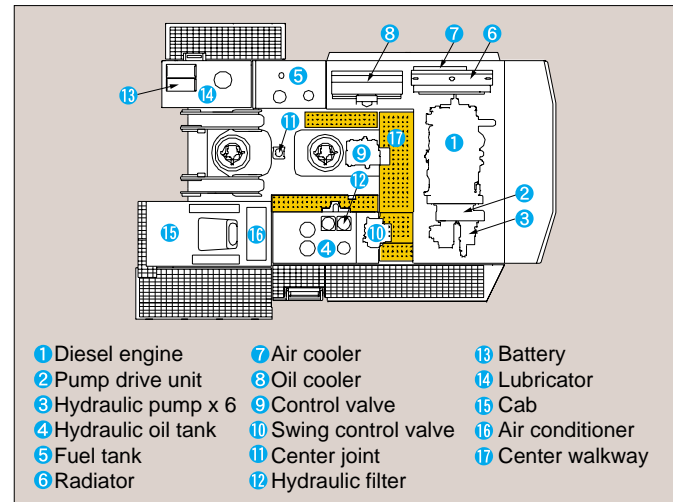

Center walkway



Toolbox space

Radiator and Oil Cooler
Designed for easy cleaning.

Auto-Grease Lubricator

Reduces the time and effort needed for lubrication.

An auto-grease lubricator is standard equipment. It dramatically reduces the work required for lubricating. (Does not lubricate the bucket area or the swing gear.)



Electric Lubricator

Provides easy lubrication of key areas.

The standard electric lubricator speeds the lubrication of the bucket area and the swing gear.



Wide Inspection Doors

Easy access to engine and pump compartments.

The inspection doors open wide to provide easy access to the engine and pump compartments.

Automatic Dust Ejector

Airborne dust and particles are separated then ejected automatically, extending cleaning and replacing interval.

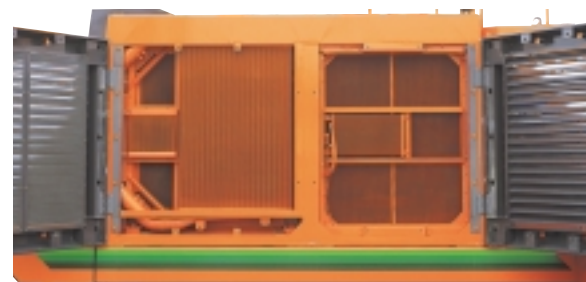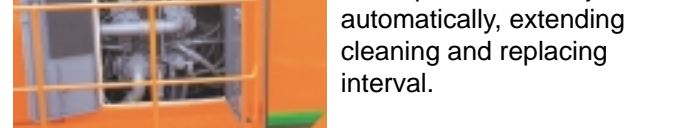

MACHINE INFORMATION CENTER

MIC (Machine Information Center) continuously records performance of the engine and the hydraulic system. The record can be downloaded to a PDA.



Download



Summary Report

Data



UNCOMPROMISING SAFETY



Adjustable Headlights

Provides bright illumination where it is needed.

The headlights above the cab can be adjusted downward to shine light on the work area.



Step Light

Equipped with shut-off timer.


The step light has a one minute shut-off timer. This allows the operator to use the ladder before the step light is turned off.



Rugged Pressurized Cab with Integrated Headguard

Offers solid protection to the operator.

The operator's cab meets strict ISO Operator Protective Guards (OPG) Level II standards. The cab structure is formed from an integral internal frame that is designed to resist operating vibration. It stands ready to protect the operator from falling objects.




Wide Sidewalks and Large Handrails

Wide sidewalks with handrails are provided at key locations for easy access to the cab and simplified servicing. Handrails conform to EN (European Norm), a world-class safety standard.



Other Devices for Safety



Pump bulkhead



Retractable seat belt



Pilot-control shutoff lever



Right window guard



Emergency evacuation hammer



ENVIRONMENTALLY FRIENDLY

Cleaner Operating Engine

Steps have been taken to reduce harmful exhaust gas emissions.

This engine is equipped with an electronic governor and meets strict EPA standards.

Plastic Parts Marked for Recycling

Striving for environmental friendliness.


The plastic parts indicate the type of plastic used to help speed recycling.



Fuse box

TRANSPORTATION

WEIGHTS OF MAJOR COMPONENTS

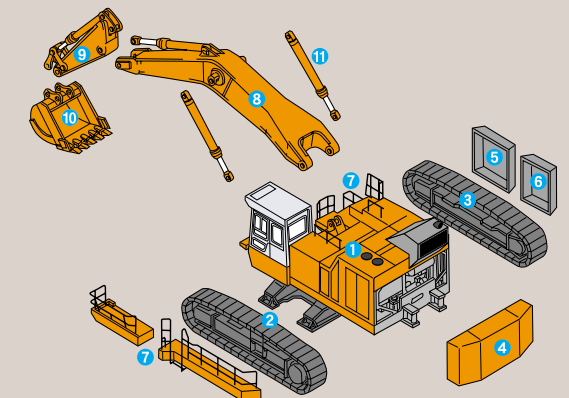

Major components	Weights
1 Main frame assembly: backhoe	33 900 kg (74 700 lb)
: loader front	34 500 kg (76 060 lb)
2 Track side frame assembly: left	14 600 kg (32 200 lb)
: right	14 600 kg (32 200 lb)
3 Counterweight	17 500 kg (38 600 lb)
4 Radiator cover	93 kg (205 lb)
5 Oil cooler cover	85 kg (187 lb)
Backhoe	
7 Sidewalk assembly: left	470 kg (1 040 lb)
Sidewalk assembly: right	181 kg (400 lb)
8 Boom assembly: 9.1 m (29' 10") boom	9 660 kg (21 300 lb)
: 7.55 m (24' 9") BE-boom	9 080 kg (20 020 lb)
9 Arm assembly: 3.4 m (11' 2") arm	5 970 kg (13 160 lb)
: 3.4 m (11' 2") BE-arm	6 100 kg (13 450 lb)
10 Bucket assembly: 5.0 m ³ (6.54 yd ³)	4 490 kg (9 900 lb)
: 6.5 m ³ (8.50 yd ³)	6 350 kg (14 000 lb)
11 Boom cylinders	1 170 kg (2 580 lb) x 2
Loading shovel	
7 Sidewalk assembly	578 kg (1 270 lb)
8 Boom and Arm assembly	15 200 kg (33 520 lb)
10 Bucket assembly: 6.5 m ³ (8.50 yd ³)	9 200 kg (20 300 lb)
11 Boom cylinders	1 170 kg (2 580 lb) x 2


PRODUCTIVE COMFORT

Cab Size **10%** Increase*
* Compared to EX1100-3

Large Comfortable Cab

Provides comfort to reduce operator fatigue


The cab is 10% larger than the previous model to provide an even higher level of comfort. It has been designed to offer clear visibility of the work area. Fluid-filled elastic mounts help reduce fatigue-causing vibration.

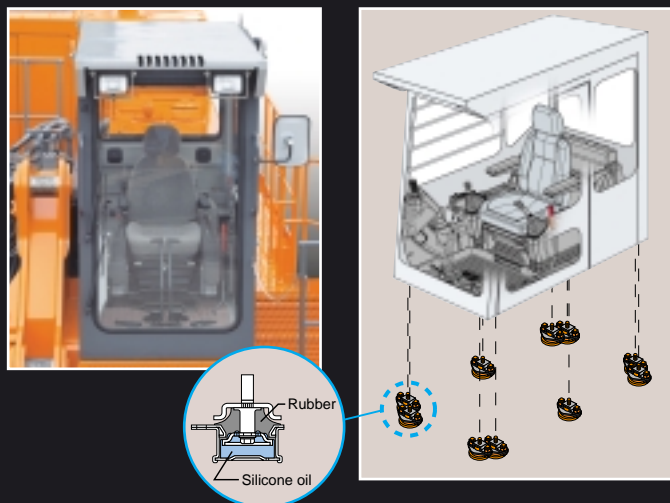

Bi-Level Automatic Air Conditioner

Automatically keeps the operator's cab at a comfortable temperature.

All the operator has to do is set the temperature. The temperature, fan speed and discharge vents will be automatically controlled. Bi-level control is also available if the operator wishes to have one area of the cab cooler or warmer than the other.

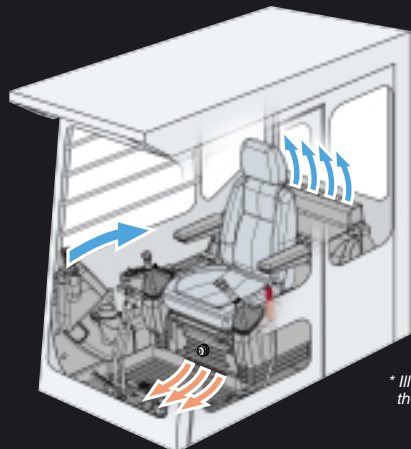

* Illustration shows a sample of the air flow during bi-level control.



One-Glance Instrument Panel

Positioned within natural line of sight.

Instrument panel is positioned so that all key operating conditions can be monitored with just a glance.



Well-Positioned Levers and Switches

Levers and switches are near the operator to reduce the need to reach for them.

The levers and switches have been strategically located to reduce the amount of operator movement required to operate them. Frequently used switches have been centralized at a location next to the operator.

Boom Mode Selector


Helps to reduce shaking and jerking of body during scraping operations.

The amount the body can be lifted or pulled by the front of machine can be selected. This helps to provide for more comfortable operation and contributes to longer component service life.




ON Comfortable mode

There is little lifting or pulling of the body so there is less vibration and shock.



OFF Powerful mode

Much lifting and pulling of the body so there is more vibration and shock.





ENGINE

Model.....Cummins QSK23
 TypeWater-cooled, 4-cycle, 6-cylinder in line, turbo-charged direct injection chamber-type diesel engine.

Rated power
 DIN 6271, net.....538 kW (731 PS) at 1 650 min⁻¹ (rpm)
 SAE J1349, net.....538 kW (721 hp) at 1 650 min⁻¹ (rpm)
 SAE J1995, gross.....567 kW (760 hp) at 1 650 min⁻¹ (rpm)

Piston displacement.....23.15 L (1 412 in³)
 Bore and stroke.....170 mm x 170 mm (6.7" x 6.7")

Batteries.....2 x 12V , 2 x 220 AH



HYDRAULIC SYSTEM

Main pumps.....3 variable-displacement, swash plate type axial piston pumps
 Main. oil flow.....3 x 495 L/min (3 x 130.8 US gpm, 3 x 108.9 Imp gpm)
 Pilot pump.....Gear pump
 Max. oil flow.....63.0 L/min (16.6 US gpm, 13.9 Imp gpm)
 Swing speed.....5.8 min⁻¹ (rpm)



BACKHOE ATTACHMENTS

Buckets

Capacity		Width		No. of teeth	Weight	Type	Materials density kg/m ³ (lb/yd ³)			
PCSA heaped (1:1)	CECE heaped (2:1)	Without shroud	With shroud				BE-front		9.1m (29' 10") boom	
							7.55 m (24' 9") BE-boom 3.4 m (11' 2") BE-arm	3.4 m (11' 2") arm	4.5 m (14' 9") arm	5.8 m (19' 0") arm
3.0 m ³ (3.92 yd ³)	2.7 m ³	1 700 mm (5'7")	1 800 mm (5'11")	5	3 100 kg (6 830 lb)	●				1 800 (3 030)
3.4 m ³ (4.45 yd ³)	3.0 m ³	1 840 mm (6'0")	1 940 mm (6'4")	5	3 250 kg (7 170 lb)	◎				1 800 (3 030)
3.5 m ³ (4.58 yd ³)	3.2 m ³	1 470 mm (4'10")	1 570 mm (5'2")	4	4 300 kg (9 480 lb)	●		1 800 (3 030)		
4.0 m ³ (5.23 yd ³)	3.6 m ³	1 620 mm (5'4")	1 720 mm (5'8")	5	4 160 kg (9 170 lb)	◎		1 800 (3 030)		
4.5 m ³ (5.89 yd ³)	4.0 m ³	1 710 mm (5'7")	1 810 mm (5'11")	5	4 650 kg (10 250 lb)	●		1 800 (3 030)		
5.0 m ³ (6.54 yd ³)	4.4 m ³	1 920 mm (6'11")	2 100 mm (6'11")	5	4 490 kg (9 900 lb)	◎		1 800 (3 030)		
5.0 m ³ (6.54 yd ³)	4.4 m ³	1 860 mm (6'1")	1 960 mm (6'5")	5	5 460 kg (12 040 lb)	●		1 800 (3 030)		
5.6 m ³ (7.32 yd ³)	4.9 m ³	2 140 mm (7'0")	2 240 mm (7'4")	5	6 510 kg (14 350 lb)	●	1 800 (3 030)			
6.5 m ³ (8.50 yd ³)	5.7 m ³	2 210 mm (7'3")	2 310 mm (7'7")	6	6 350 kg (14 000 lb)	◎	1 800 (3 030)			

●: Rock bucket ◎: General purpose bucket



LOADING SHOVEL ATTACHMENTS

Bucket (PCSA heaped 2:1)

Capacity	Width	No. of teeth	Weight	Type	Materials density
5.9 m ³ (7.7 yd ³)	2 510 mm (8' 3")	6	9 780 kg (21 600 lb)	●	1 800 kg/m ³ (3 030 lb/yd ³)
6.5 m ³ (8.5 yd ³)	2 700 mm (8' 10")	6	9 200 kg (20 300 lb)	◎	1 800 kg/m ³ (3 030 lb/yd ³)

●: Bottom dump type rock bucket
 ◎: Bottom dump type general purpose bucket



OPTIONAL EQUIPMENT

- Travel motion alarm device
- High cab kit (for Backhoe)
- Full track guard



WEIGHTS AND GROUND PRESSURE

Backhoe
 EX1200-5D : Equipped with 9.1 m (29' 10") boom, 3.4 m (11' 2") arm, and 5.0 m³ (6.54 yd³; PCSA heaped) bucket

Shoe type	Shoe width	Operating weight	Ground pressure
Double grousers	710 mm (28")	108 000 kg (238 100 lb)	136 kPa (1.39 kgf/cm ² , 19.7 psi)
	900 mm (35")	110 000 kg (242 500 lb)	109 kPa (1.11 kgf/cm ² , 15.8 psi)

EX1200-5D BE-front : Equipped with 7.55 m (24' 9") BE-boom, 3.4 m (11' 2") BE-arm, and 6.5 m³ (8.50 yd³; PCSA heaped) bucket

Shoe type	Shoe width	Operating weight	Ground pressure
Double grousers	710 mm (28")	109 000 kg (240 300 lb)	137 kPa (1.40 kgf/cm ² , 19.9 psi)
	900 mm (35")	111 000 kg (244 700 lb)	109 kPa (1.12 kgf/cm ² , 16.0 psi)


Loading Shovel

Equipped with 6.5 m³ (8.5 yd³; PCSA heaped) bottom dump bucket


Shoe type	Shoe width	Operating weight	Ground pressure
Double grousers	710 mm (28")	111 000 kg (244 700 lb)	139 kPa (1.40 kgf/cm ² , 20.2 psi)




WORKING RANGES

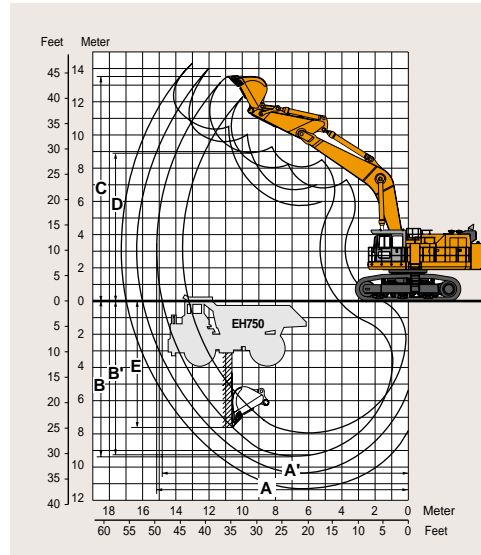

	7.55 m (24' 9") BE-boom	9.1 m (29' 10")		
	3.4 m (11' 2") BE-arm	3.4 m (11' 2")	4.5 m (14' 9")	5.8 m (19' 0")
A Max. digging reach	13 760 mm (45' 2")	15 340 mm (50' 4")	16 380 mm (53' 9")	17 360 mm (56' 11")
A' Max. digging reach (on ground)	13 380 mm (43' 11")	15 000 mm (49' 3")	16 070 mm (52' 9")	17 070 mm (56' 0")
B Max. digging depth	7 940 mm (26' 1")	9 340 mm (30' 8")	10 420 mm (34' 2")	11 420 mm (37' 6")
B' Max. digging depth (8'level)	7 820 mm (25' 8")	9 210 mm (30' 3")	10 310 mm (33' 10")	11 330 mm (37' 2")
C Max. cutting height	12 300 mm (40' 4")	13 490 mm (44' 3")	14 020 mm (46' 0")	14 400 mm (47' 3")
D Max. dumping height	8 020 mm (26' 4")	8 920 mm (29' 3")	9 430 mm (30' 11")	10 360 mm (34' 0")
E Max. vertical wall depth	5 080 mm (16' 8")	7 620 mm (25' 0")	8 880 mm (29' 2")	10 360 mm (34' 0")
Bucket digging force	550 (56 100, 123 700)	457 (46 600, 102 700)	457 (46 600, 103 000)	326 (33 200, 73 200)
	ISO	SAE:PCSA		
kN (kgf, lbf)		500 (51 000, 112 400)	418 (42 600, 93 900)	293 (29 900, 65 900)
Arm crowd force	412 (42 000, 92 600)	411 (41 900, 92 400)	330 (33 700, 74 300)	287 (29 300, 64 600)
	ISO	SAE:PCSA		
kN (kgf, lbf)		402 (41 000, 90 400)	402 (41 000, 90 400)	325 (33 100, 73 000)

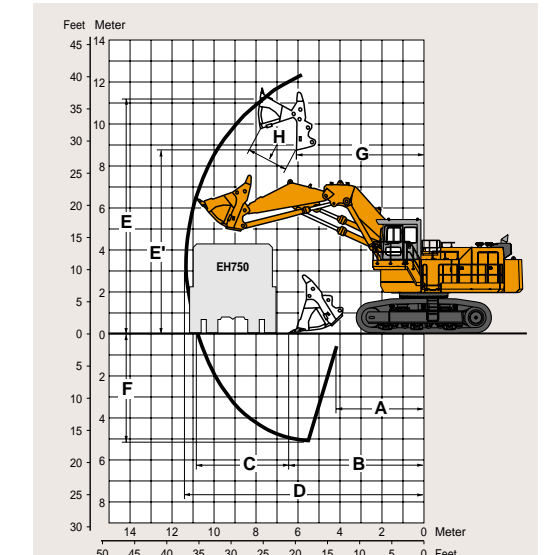

	Bottom dump type
A Min. digging distance	4 460 mm (14' 8")
B Min. level crowding distance	6 520 mm (21' 5")
C Level crowding distance	4 340 mm (14' 3")
D Max. digging reach	11 440 mm (37' 6")
E Max. cutting height	12 350 mm (40' 6")
E' Max. dumping height	8 740 mm (28' 8")
F Max. digging depth	5 240 mm (17' 2")
G Working radius at max. dumping height	6 090 mm (20' 0")
H Max. bucket opening width	1 880 mm (6' 2")
Crowding force	583 kN (59 400 kgf, 131 000 lbf)
Breakout force	589 kN (60 100 kgf, 132 500 lbf)

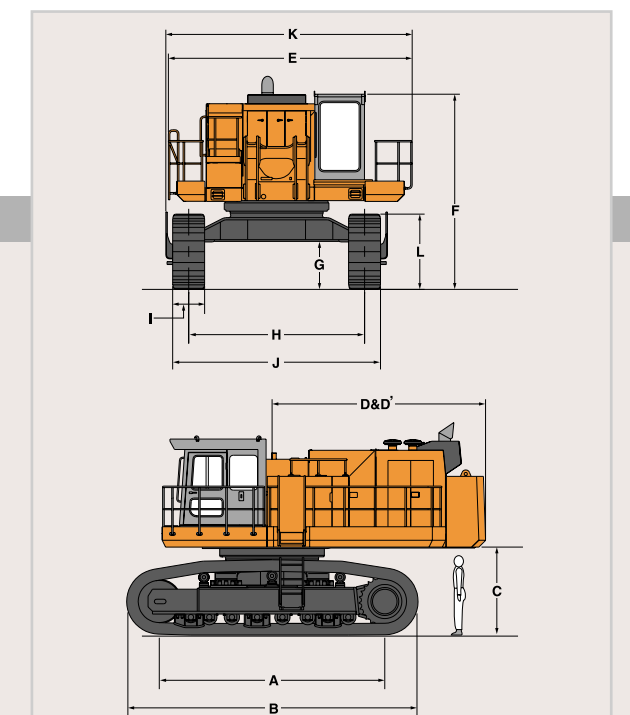

DIMENSIONS


A Distance between tumblers	5 000 mm (16' 5")
B Undercarriage length	6 410 mm (21' 0")
C Counterweight clearance	1 790 mm (5' 10")
D Rear-end swing radius	4 850 mm (15' 11")
D' Rear-end length	4 740 mm (15' 7")
E Overall width of upper structure	5 380 mm (17' 8")
F Overall height of cab: Backhoe	4 320 mm (14' 2")
	: Loading shovel ... 5 410 mm (17' 9")
G Min. ground clearance	990 mm (3' 3")
H Track gauge	3 900 mm (12' 10")
I Track shoe width	710 mm (28")/900 mm (35")
J Undercarriage width	4 610 mm (15' 1")/4 800 mm (15' 9")
K Overall width	5 430 mm (17' 10")
L Track height	1 570 mm (5' 2")

UPPERSTRUCTURE Assembly requires no welding.

Unit: mm (ft in)


Upperstructure

Weight: 33 900 kg (74 700 lb)
Width: 3 500 (11'6")

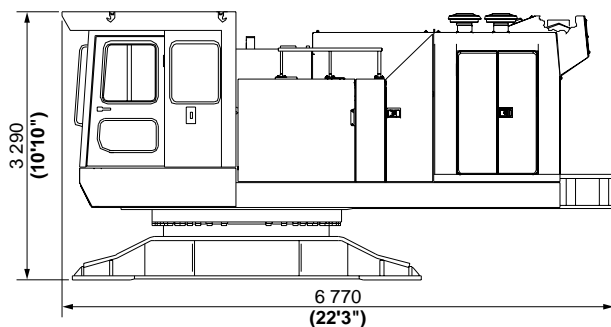


Counterweight

Weight: 17 500 kg (38 600 lb)
Width: 3 450 (11'4")




Side step

Weight: 21 kg (46 lb)
Width: 110 (4")




Sidewalk for backhoe

Weight: 217 kg (478 lb)
Width: 1 020 (3'4")




Sidewalk for loading shovel

Weight: 180 kg (397 lb)
Width: 1 050 (3'5")




High cab kit for loading shovel (Optional equipment for backhoe)

Weight: 590 kg (1 300 lb)
Width: 1 100 (3'7")




Fender (Left rear side)

Weight: 144 kg (317 lb)
Width: 798 (2'7")




Fender (Left rear side)

Weight: 160 kg (353 lb)
Width: 644 (2'1")




Muffler Cover

Weight: 90.7 kg (200 lb)
Width: 1 390 (4'7")




Sidewalk

Weight: 18 kg (40 lb)
Width: 192 (7.6")




Sidewalk

Weight: 181 kg (400 lb)
Width: 835 (2'9")




Step for loading shovel

Weight: 145 kg (320 lb)
Width: 1 050 (3'5")




Handrail

Weight: 264 kg (582 lb)
Width: 680 (2'3")




Handrail

Weight: 46 kg (101 lb)
Width: 50 (2")




Radiator cover

Weight: 93 kg (205 lb)
Width: 100 (3.9")



Oil cooler cover


Weight: 85 kg (187 lb)
Width: 100 (3.9")



UNDERCARRIAGE


Side frame

Weight: 14 600 kg (32 200 lb) x 2, Width : 710 (2'4")

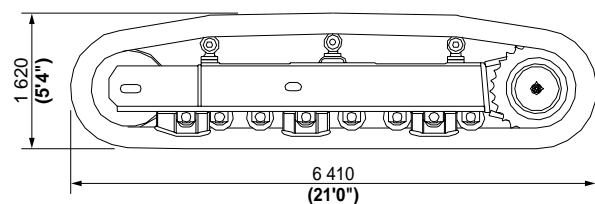


Traction device cover

Weight: 24 kg (53 lb) x 2
Width: 330 (1'1")




Steps

Weight: 18 kg (40 lb) x 2
Width: 125 (4.9")



Ladder


Weight: 20 kg (44 lb)
Width: 300 (11.9")



OVERALL


LOADING SHOVEL

Weight: 111 000 kg (244 800 lb)
Width: 5 470 (17'11")

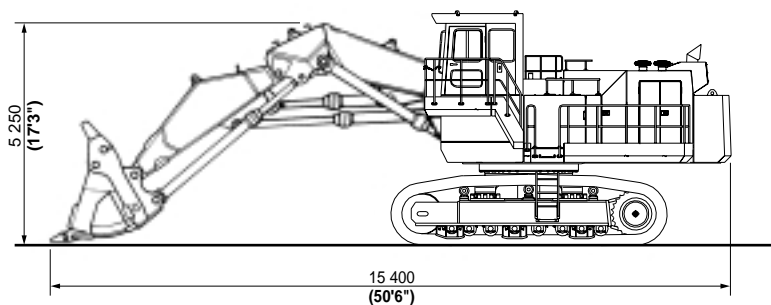


LOADING SHOVEL ATTACHMENTS

Bucket




Bucket capacity	A	B	Max. Width	Weight
	mm (ft in)	mm (ft in)	mm (ft in)	kg (lb)
5.9 m ³ (7.7 yd ³)	2 770 (9'1")	2 480 (8'2")	2 690 (8'10")	9 780 kg (21 600 lb)
6.5 m ³ (8.5 yd ³)	2 770 (9'1")	2 680 (8'10")	2 890 (9'6")	9 200 kg (20 300 lb)

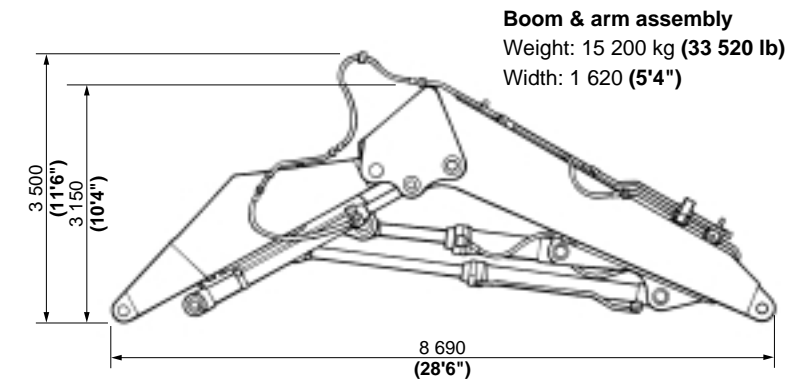


Boom cylinders

Weight: 1 170 kg (2 580 lb)

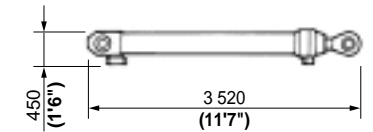


BACKHOE ATTACHMENTS

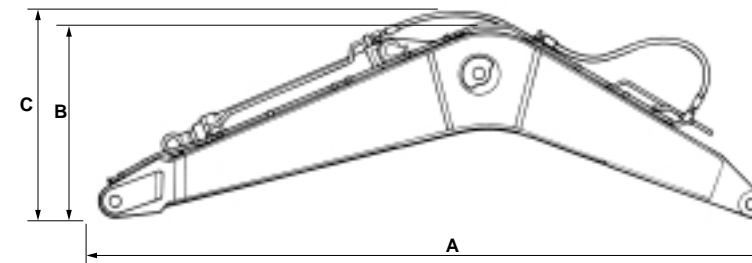


	Boom length	A	B	C	Width	Weight
EX1200-5D	9.1 m (29'10")	9 500 mm (31'2")	2 810 mm (9'3")	3 100 mm (10'2")	1 460 mm (4'9")	9 660 kg (21 300 lb)
EX1200-5D BE-boom	7.55 m (24'9")	7 960 mm (26'3")	3 150 mm (10'4")	3 400 mm (11'2")	1 460 mm (4'9")	9 080 kg (20 020 lb)

Arm

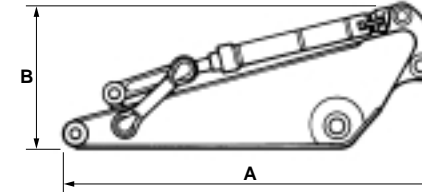


	Arm length	A	B	Width	Weight
EX1200-5D	3.4 m (11'2")	4 830 mm (15'10")	1 850 mm (6'1")	960 mm (3'2")	5 970 kg (13 160 lb)
	4.5 m (14'9")	5 975 mm (19'7")	1 700 mm (5'7")	960 mm (3'2")	6 300 kg (13 890 lb)
	5.8 m (19'0")	7 200 mm (23'8")	1 750 mm (5'9")	985 mm (3'3")	5 930 kg (13 070 lb)
EX1200-5D BE-boom	3.4 m (11'2")	4 880 mm (16'0")	1 850 mm (6'1")	960 mm (3'2")	6 100 kg (13 450 lb)

Boom cylinders Weight: 1 170 kg (2 580 lb) x 2



OVERALL

	A	B	Width
EX1200-5D	16 170 mm (53'1")	5 720 mm (18'9")	5 470 mm (17'11")
EX1200-5D BE-boom	14 620 mm (48'0")	6 400 mm (21'0")	5 470 mm (17'11")

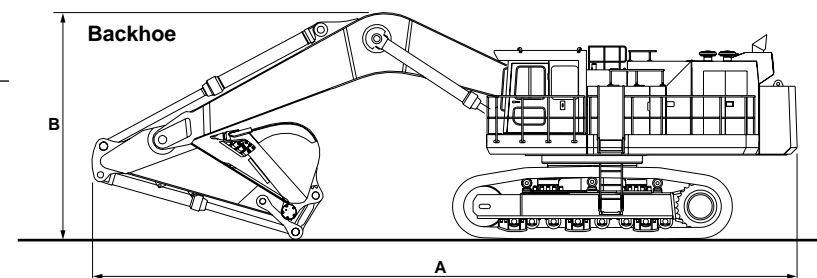


Capacity		A	B	Width	Weight	Type
PCSA heaped	CECE heaped					
3.0 m ³ (3.92 yd ³)	2.7 m ³	1 890 mm (6'2")	2 310 mm (7'7")	1 800 mm (5'11")	3 100 kg (6 830 lb)	●
3.4 m ³ (4.45 yd ³)	3.0 m ³	1 890 mm (6'2")	2 310 mm (7'7")	1 940 mm (6'4")	3 250 kg (7 170 lb)	○
3.5 m ³ (4.58 yd ³)	3.2 m ³	2 300 mm (7'7")	2 480 mm (8'2")	1 460 mm (4'9")	4 300 kg (9 480 lb)	●
4.0 m ³ (5.23 yd ³)	3.6 m ³	2 280 mm (7'6")	2 480 mm (8'2")	1 720 mm (5'8")	4 160 kg (9 170 lb)	○
4.5 m ³ (5.89 yd ³)	4.0 m ³	2 300 mm (7'7")	2 480 mm (8'2")	1 810 mm (5'11")	4 650 kg (10 250 lb)	●
5.0 m ³ (6.54 yd ³)	4.4 m ³	2 460 mm (8'1")	2 250 mm (7'5")	2 100 mm (6'11")	4 490 kg (9 900 lb)	○
5.0 m ³ (6.54 yd ³)	4.4 m ³	2 560 mm (8'5")	2 280 mm (7'6")	1 960 mm (6'5")	5 460 kg (12 040 lb)	●
5.6 m ³ (7.32 yd ³)	4.9 m ³	2 630 mm (8'8")	2 260 mm (7'5")	2 240 mm (7'4")	6 510 kg (14 350 lb)	●
6.5 m ³ (8.50 yd ³)	5.7 m ³	2 710 mm (8'11")	2 240 mm (7'4")	2 310 mm (7'7")	6 350 kg (14 000 lb)	○

●: Rock bucket ○: General purpose bucket

EX1200-5D

LIFTING CAPACITIES



A: Load radius
B: Load point height
C: Lifting capacity

METRIC MEASURE



Rating over-side or 360 degrees



Rating over-front

Unit: 1 000 kg

Conditions	Load point height	Load radius														At max. reach		meter	
		2 m		4 m		6 m		8 m		10 m		12 m		14 m		meter			
EX1200-5D Boom 9.1 m Arm 4.5 m Bucket PCSA : 4.0 m ³ CECE : 3.6 m ³ Shoes 710 mm	10 m												*10.2	*10.2			*5.24	*5.24	14.6
													*11.1	*11.1			*5.87	*5.87	
	8 m												*11.5	*11.5			*5.07	*5.07	15.4
													*12.8	*12.8			*5.68	*5.68	
	6 m												*12.1	*12.1			*5.09	*5.09	15.9
													*13.5	*13.5			*5.71	*5.71	
	4 m							*20.6	*20.6	*15.8	*15.8	13.0	*13.3	9.22	*11.5	*5.28	*5.28	16.0	
								*22.6	*22.6	*17.5	*17.5	13.0	*14.8	9.22	*12.6	*5.92	*5.92		
	2 m							24.3	*24.6	16.9	*18.1	12.2	*14.5	8.86	*12.5	*5.67	*5.67	15.8	
								24.3	*27.0	16.9	*20.0	12.2	*16.2	8.86	12.5	*6.33	*6.33		
0 (Ground)							22.8	*27.0	15.9	*19.8	11.6	*15.6	8.54	12.2	*6.30	*6.30	15.4		
							22.8	*29.7	15.9	*21.8	11.6	16.1	8.54	12.2	*7.00	*7.00			
-2 m							22.1	*27.8	15.3	*20.6	11.2	15.7			*7.28	*7.28	14.6		
							22.1	*30.5	15.3	21.3	11.2	15.7			*8.04	*8.04			
-4 m				*19.8	*19.8	36.3	*36.7	22.0	*26.9	15.1	*20.2	11.1	*15.4			*8.87	*8.87	13.3	
				*21.5	*21.5	36.3	*40.2	22.0	*29.6	15.1	21.1	11.1	15.6			*9.72	*9.72		
-6 m				*38.1	*38.1	*32.4	*32.4	22.4	*24.3	15.4	*18.2								
				*40.9	*40.9	*35.6	*35.6	22.4	*26.8	15.4	*20.1								
-8 m						*25.0	*25.0	*18.6	*18.6										
						*27.6	*27.6	*20.7	*20.7										
EX1200-5D Boom 9.1 m Arm 5.8 m Bucket PCSA : 3.4 m ³ CECE : 3.0 m ³ Shoes 710 mm	8 m														*9.25	*9.25	*4.38	*4.38	16.2
															*10.1	*10.1	*4.93	*4.93	
	6 m												*11.8	*11.8	11.0	*11.2	*4.38	*4.38	16.7
													*13.0	*13.0	11.0	*12.5	*4.93	*4.93	
	4 m										*15.2	*15.2	*13.1	*13.1	10.6	*11.9	*4.52	*4.52	16.8
											*16.8	*16.8	14.4	*14.5	10.6	*13.2	*5.08	*5.08	
	2 m							*23.4	*23.4	*17.8	*17.8	13.6	*14.6	10.1	*12.7	*4.82	*4.82	16.7	
								*25.6	*25.6	18.6	*19.5	13.6	*16.2	10.1	13.8	*5.39	*5.39		
	0 (Ground)							24.6	*26.8	17.4	*19.9	12.8	*16.0	9.64	13.3	*5.30	*5.30	16.3	
								24.6	*29.3	17.4	*21.9	12.8	17.4	9.64	13.3	*5.90	*5.90		
-2 m					*22.8	*22.8	23.4	*28.5	16.5	*21.3	12.2	16.8	9.33	13.0	*6.04	*6.04	15.6		
					*24.5	*24.5	23.4	*31.2	16.5	22.5	12.2	16.8	9.33	13.0	*6.69	*6.69			
-4 m				*17.4	*17.4	*33.4	*33.4	22.9	*28.7	16.1	*21.7	12.0	16.5	9.28	*11.5	*7.19	*7.19	14.5	
				*18.9	*18.9	*35.9	*35.9	22.9	*31.5	16.1	22.1	12.0	16.5	9.28	*12.5	*7.91	*7.91		
-6 m		*22.0	*22.0	*29.4	*29.4	37.2	*37.4	23.0	*27.3	16.1	*20.7	12.0	*15.8			*9.13	*9.13	13.0	
		*23.8	*23.8	*31.6	*31.6	37.2	*40.9	23.0	*30.0	16.1	22.0	12.0	16.6			*9.97	*9.97		
-8 m				*45.5	*45.5	*31.9	*31.9	23.6	*23.7	16.6	*17.5					*8.81	*8.81	10.8	
				*49.7	*49.7	*35.0	*35.0	23.6	*26.0	16.6	*19.3					*9.48	*9.48		

With heavy lifting system

Notes: 1. Ratings are based on SAE J1097.

2. Lifting capacity of the EX Series does not exceed 75% of tipping load with the machine on firm, level ground or 87% full hydraulic capacity.

3. The load point is a hook (not standard equipment) loaded on the back of the bucket.

4. *Indicates load limited by hydraulic capacity.

HITACHI

Hitachi Mining Products

P.O. Box 8806 • 1515 5th Avenue • Moline, IL 61265

www.hitachiminig.com

These specifications are subject to change without notice. Illustrations and photos show the standard models, and may or may not include optional equipment, accessories, and all standard equipment with some differences in color and features.

DKAEX1200HT (06-05)